




ISLA JANO WH 960 RF

Cod. 8351

EAN 8435025783515

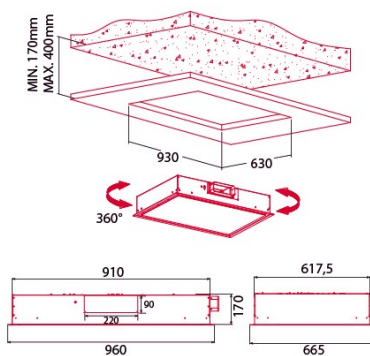

GENERAL INFORMATION

EAN/UPC	8435025783515
Subfamily	Ceiling

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	233
EI class (energy efficiency class)	A++
FDE (fluid dynamic efficiency)	397
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	263
LE class (light efficiency class)	B
GFE (grease filtering efficiency)	586
GFE class (grease filtering efficiency class)	E
Airflow in normal mode MIN (m3/h)	264
Airflow in normal mode MAX (m3/h)	580
Airflow in boost mode MIN (m3/h)	614
Acoustic power in normal mode MIN (dB)	50
Acoustic power in normal mode MAX (dB)	65
Acoustic power boost mode (dB)	67
Po (energy consumption in off mode) (W)	0,32
Ps (energy consumption in standby mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	0,6
EI (Energy Efficiency Index)	352
QBEP (maximum efficiency at air flow point) (m3/h)	285
PBEP (maximum efficiency at pressure point) (Pa)	434
WBEP (power consumption at maximum efficiency) (W)	866
WL (nominal power lighting system) (W)	6
EMIDDLE (Average illuminance on the cooking surface) (lux)	166

External Dimensions

Width (mm)	960
Depth (mm)	665
Maximum total height (mm)	170
Minimum total height (mm)	170

Characteristics

Motor quantity	1
Motor model	S6
Maximum pressure (Pa)	470
Control technology	PANEL ELECTRONICO DISPLAY DIGITAL
Booster	✓
Power levels	6
Timer	✓
Filter saturation indicator	✓
Charcoal filter replacement indicator	✓
Dimmer function	✓
Connectivity	✓
Remote control	✓
Display	Display

Lighting

Light model	SSLED
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	660
Recirculation option	✓
Charcoal filter	✓

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	96
Electric shock protection	Class I
Plug type	No plug