




NorBreeze BISE 600 SS

Cod. 8354

EAN 8435025783546

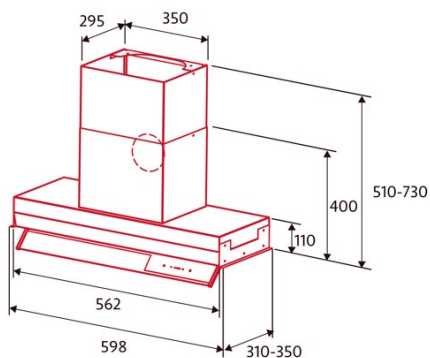

GENERAL INFORMATION

| | |
|-----------|---------------|
| EAN/UPC | 8435025783546 |
| Subfamily | Integrated |

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|------|
| AEC (Annual energy consumption) (kWh/year) | 40,4 |
| EI class (energy efficiency class) | A |
| FDE (fluid dynamic efficiency) | 32,3 |
| FDE class (fluid dynamic efficiency class) | A |
| LE (light efficiency) (lux/W) | 31,6 |
| LE class (light efficiency class) | A |
| GFE (grease filtering efficiency) | 97,1 |
| GFE class (grease filtering efficiency class) | A |
| Airflow in normal mode MIN (m3/h) | 240 |
| Airflow in normal mode MAX (m3/h) | 605 |
| Airflow in boost mode MIN (m3/h) | 605 |
| Acoustic power in normal mode MIN (dB) | 690 |
| Acoustic power in normal mode MAX (dB) | 45 |
| Acoustic power boost mode (dB) | 62 |
| Po (energy consumption in off mode) (W) | 0 |
| Ps (energy consumption in standby mode) (W) | 0,49 |

Integration directive EU 66/2014

| | |
|--|-------|
| f (time increase factor) | 0,8 |
| EI (Energy Efficiency Index) | 45,8 |
| QBEP (maximum efficiency at air flow point) (m3/h) | 320,5 |
| PBEP (maximum efficiency at pressure point) (Pa) | 467 |
| WBEP (power consumption at maximum efficiency) (W) | 128,8 |
| WL (nominal power lighting system) (W) | 3,8 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 120 |

External Dimensions

| | |
|---------------------------|-----|
| Width (mm) | 562 |
| Depth (mm) | 310 |
| Maximum total height (mm) | 730 |
| Minimum total height (mm) | 510 |
| Diamètre de sortie (mm) | 150 |

Characteristics

| | |
|---------------------------------------|--------------------------|
| Motor quantity | 1 |
| Maximum pressure (Pa) | 544 |
| Control technology | Electronic Touch Control |
| Booster | √ |
| Power levels | 4 |
| Timer | √ |
| Filter saturation indicator | - |
| Charcoal filter replacement indicator | - |
| Dimmer function | √ |
| Connectivity | No |
| Remote control | - |

Lighting

| | |
|----------------|-----|
| Ray technology | LED |
|----------------|-----|

Installation

| | |
|---|----------|
| Minimum distance to electric plate (mm) | 650 |
| Minimum distance to gas plate (mm) | 650 |
| Charcoal filter | - |
| Back draught shutter | Included |

Electric connection

| | |
|---------------------------|----------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Electric shock protection | Class II |
| Plug type | Type F |

Accessories

| | |
|---------------------------------|---------------------------------|
| Upper decorative duct extension | STANDARD CIMNEYS IN THE PRODUCT |
| Back draught shutter | STANDARD IN THE MOTOR |
| Activated charcoal filter | N°1 KF30 (435X192X9,5) |