




## NorBreeze BISE 600 SS

Cod. 8354

EAN 8435025783546

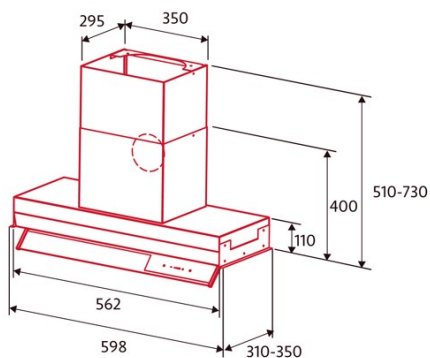

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8435025783546 |
| Subfamily | Integrated    |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|   |      |
|---|------|
| AEC (Annual energy consumption) (kWh/year)    | 40,4 |
| EI class (energy efficiency class)            | A    |
| FDE (fluid dynamic efficiency)                | 32,3 |
| FDE class (fluid dynamic efficiency class)    | A    |
| LE (light efficiency) (lux/W)                 | 31,6 |
| LE class (light efficiency class)             | A    |
| GFE (grease filtering efficiency)             | 97,1 |
| GFE class (grease filtering efficiency class) | A    |
| Airflow in normal mode MIN (m3/h)             | 240  |
| Airflow in normal mode MAX (m3/h)             | 605  |
| Airflow in boost mode MIN (m3/h)              | 605  |
| Acoustic power in normal mode MIN (dB)        | 690  |
| Acoustic power in normal mode MAX (dB)        | 45   |
| Acoustic power boost mode (dB)                | 62   |
| Po (energy consumption in off mode) (W)       | 0    |
| Ps (energy consumption in standby mode) (W)   | 0,49 |

### Integration directive EU 66/2014

|  |       |
|--|-------|
| f (time increase factor)                                   | 0,8   |
| EI (Energy Efficiency Index)                               | 45,8  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 320,5 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 467   |
| WBEP (power consumption at maximum efficiency) (W)         | 128,8 |
| WL (nominal power lighting system) (W)                     | 3,8   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 120   |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 562 |
| Depth (mm)                | 310 |
| Maximum total height (mm) | 730 |
| Minimum total height (mm) | 510 |
| Diamètre de sortie (mm)   | 150 |

### Characteristics

|                                       |                          |
|---------------------------------------|--------------------------|
| Motor quantity                        | 1                        |
| Maximum pressure (Pa)                 | 544                      |
| Control technology                    | Electronic Touch Control |
| Booster                               | √                        |
| Power levels                          | 4                        |
| Timer                                 | √                        |
| Filter saturation indicator           | -                        |
| Charcoal filter replacement indicator | -                        |
| Dimmer function                       | √                        |
| Connectivity                          | No                       |
| Remote control                        | -                        |

### Lighting

|                |     |
|----------------|-----|
| Ray technology | LED |
|----------------|-----|

### Installation

|   |          |
|---|----------|
| Minimum distance to electric plate (mm) | 650      |
| Minimum distance to gas plate (mm)      | 650      |
| Charcoal filter                         | -        |
| Back draught shutter                    | Included |

### Electric connection

|                           |          |
|---------------------------|----------|
| Nominal voltage (V)       | 220-240  |
| Nominal frequency (Hz)    | 50/60    |
| Electric shock protection | Class II |
| Plug type                 | Type F   |

### Accessories

|                                 |                                 |
|---------------------------------|---------------------------------|
| Upper decorative duct extension | STANDARD CIMNEYS IN THE PRODUCT |
| Back draught shutter            | STANDARD IN THE MOTOR           |
| Activated charcoal filter       | N°1 KF30 (435X192X9,5)          |